

## 1 Standards & Conditions

### Design Standards

The designs and the productions are in conformity with:

- Conformance Europeenne (CE)
- China Compulsory Certification (CCC)
- ISO8528-5:2005
- GB/T2820.5-2009

### Environmental Operating Conditions

- Installation place: Indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters above sea level.

### Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

### Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


## 2 General Features

- Cummins engine KTA38-G5
- Coupled to a Leroy-Somer or Stamford alternator
- Microprocessor control module PLC-7420
- DMA main circuit breaker: 1600A
- Rotate speed governor: Electrical governor
- Excitation System: PMG
- A.V.R.Model: MX341
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle

- 2x12V/150AH sealed for life maintenance free battery
- Lockable battery isolator switch
- 50°C radiator
- Oil pump on the engine
- Steel base frame with lifting lug
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Operation Manual / Specifications

## 3 Equipment Specification

### General technical data

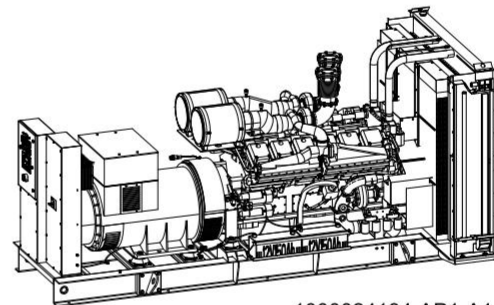


1000024184-AP1-A1

Model.....G1000DG  
Structure type ..... A  
Tank capacity..... N/A  
Dry weight..... 7622kg  
Sound pressure level @7m ..... N/A  
Sound power level acc. 2000/14/EC ..... N/A  
Dimensions L×W×H..... 4728x2060x2208mm  
Standby Power ..... 1100kVA/880kW  
Prime Power ..... 1000kVA/800kW

|                         |       |       |       |       |      |
|-------------------------|-------|-------|-------|-------|------|
| Voltage                 | 380V  | 400V  | 415V  | 440V  |      |
| Ampere                  | 1519A | 1443A | 1391A | 1312A |      |
| Genset Fuel Consumption |       |       |       |       |      |
| Frequency/Load          | 25%   | 50%   | 75%   | 100%  | 110% |
| 50Hz (L/h)              | 65    | 113   | 161   | 209   | 228  |


## Diesel engine

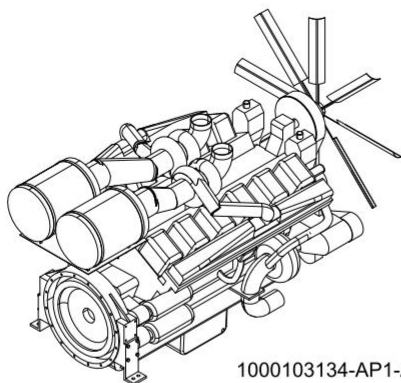

1000103134-AP1-A1

|                                 |                |
|---------------------------------|----------------|
| Engine Manufacturer/Brand.....  | Cummins        |
| Engine Model.....               | KTA38-G5       |
| Dimensions L×W×H.....           | N/A            |
| Dry Weigh (approx.) .....       | 3723kg         |
| Number of Cylinders.....        | 12             |
| Bore.....                       | 159mm          |
| Stroke.....                     | 159mm          |
| Displacement.....               | 37.8L          |
| Compression Ratio.....          | 13.9           |
| Type of injection.....          | Direct         |
| Intake System.....              | Turbocharged   |
| Intake Resistance.....          | 6.23kPa        |
| Cooling System .....            | Water cooled   |
| Fan .....                       | Pusher         |
| Battery Voltage .....           | 24V            |
| Type of Fuel.....               | No.2 Diesel    |
| Type of Oil .....               | CF4/SG15W-40   |
| Oil Capacity .....              | 135L           |
| Type of Coolant .....           | Glycol mixture |
| Coolant Capacity .....          | 199L           |
| Back Pressure .....             | ≤10kPa         |
| Standby Power .....             | 970kW          |
| Prime Power .....               | 880kW          |
| Fuel Consumption(100%load)..... | 209L/h         |


## Alternator

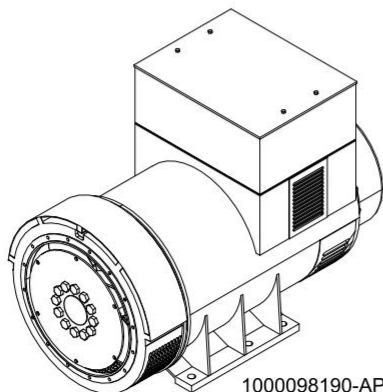

1000098190-AP1-A1

|                                                           |                                |
|-----------------------------------------------------------|--------------------------------|
| Alternator Manufacturer/Brand .....                       | Stamford                       |
| Alternator Model .....                                    | LVI634E                        |
| Exciter.....                                              | Brushless                      |
| Cooling Fan .....                                         | Cast alloy aluminum            |
| Windings.....                                             | 100% copper                    |
| Insulation Class .....                                    | H                              |
| Winding Pitch.....                                        | 2/3                            |
| Terminals .....                                           | 12                             |
| Drip Proof .....                                          | IP23                           |
| Altitude.....                                             | ≤1000m                         |
| Overspeed .....                                           | 2250rpm                        |
| Air Flow.....                                             | 2.18m³/s(50Hz), 2.63m³/s(60Hz) |
| Voltage Regulation .....                                  | ±0.5%                          |
| Total Harmonic TGH / THCat no load < 1.5 % - on load < 5% |                                |
| Telephone Interference.....                               | THF<2%;TIF<50                  |

## PLC-7420 Control System



1000246265-AP1-A1

PLC-7420 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol



# 4. Open Type Overall Dimensions

