


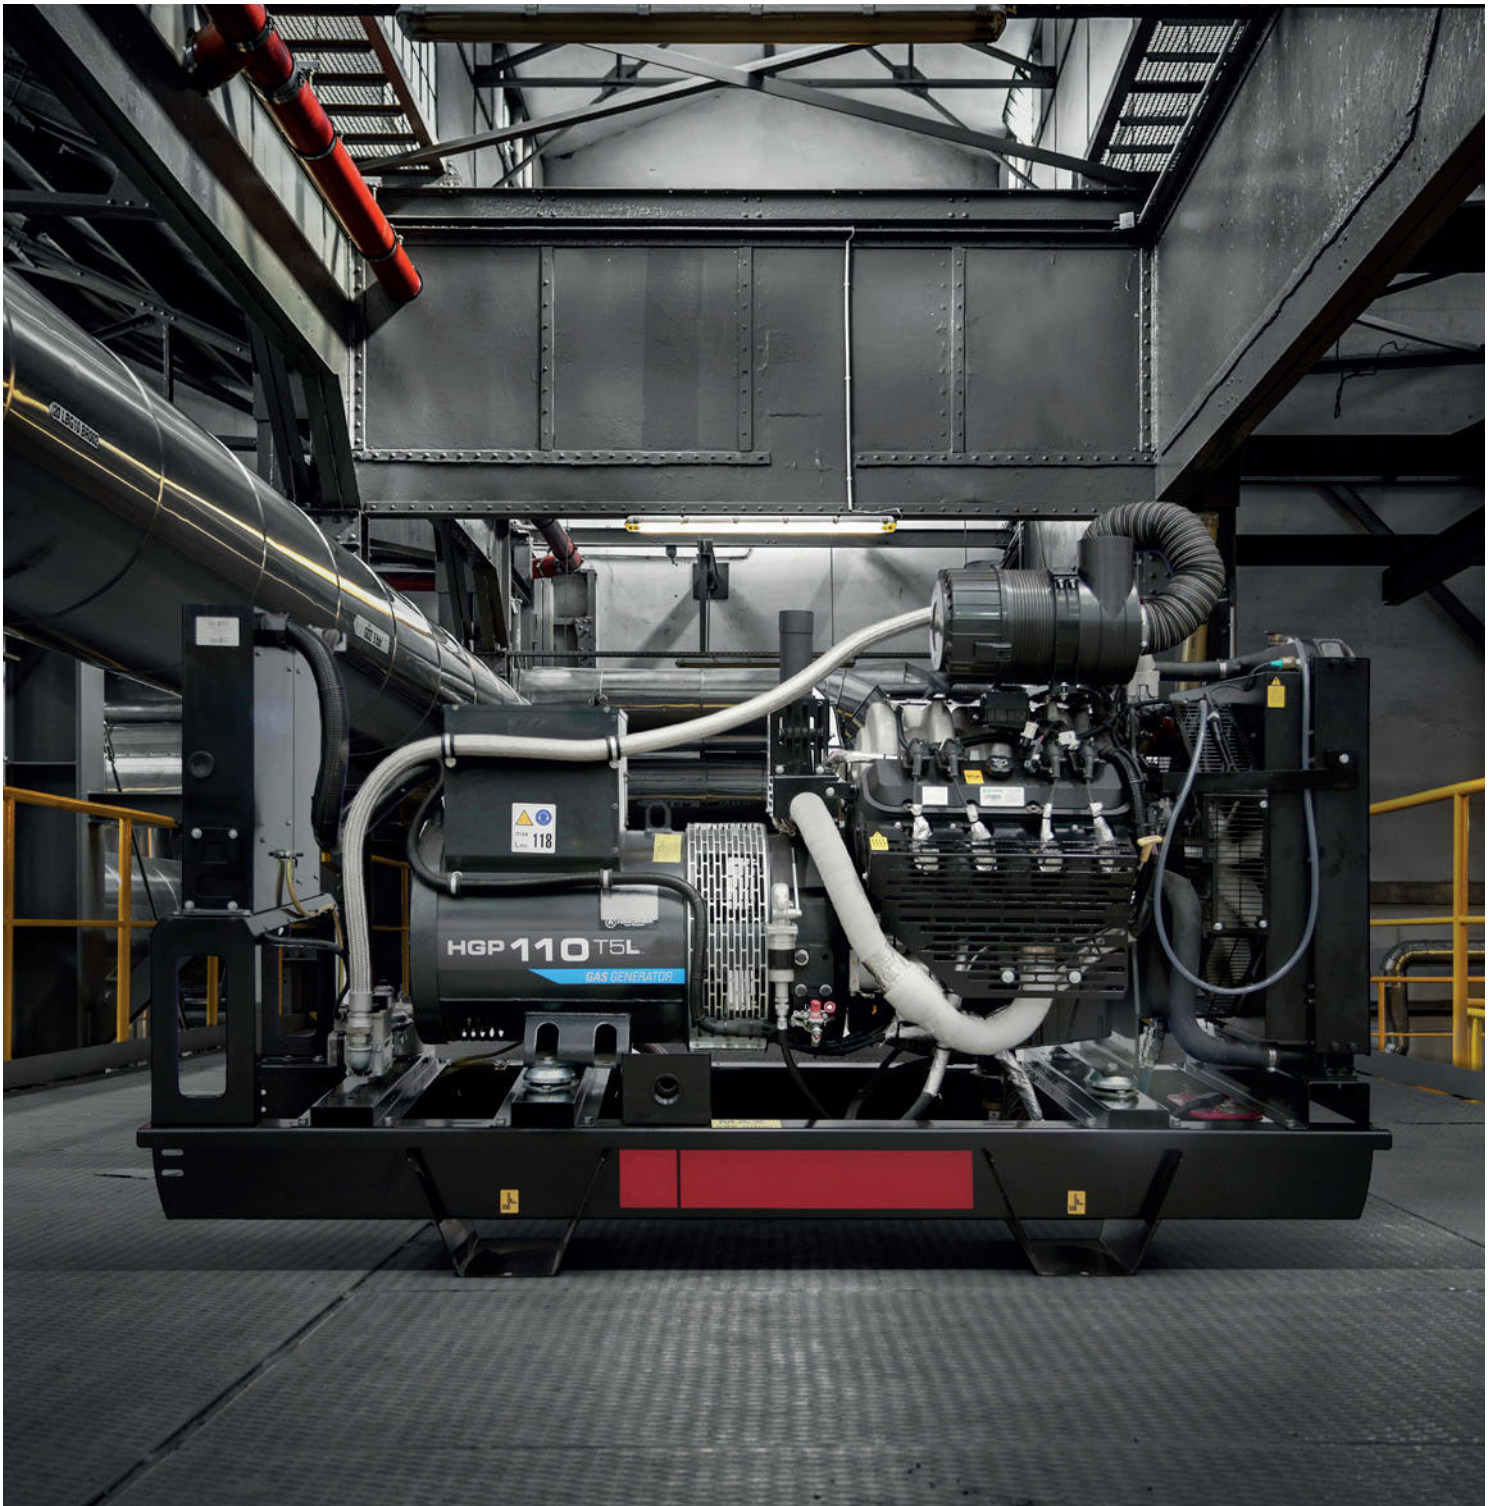


GAS

CONTINUOUS POWER

Gas Generator Set

Model: G200NG

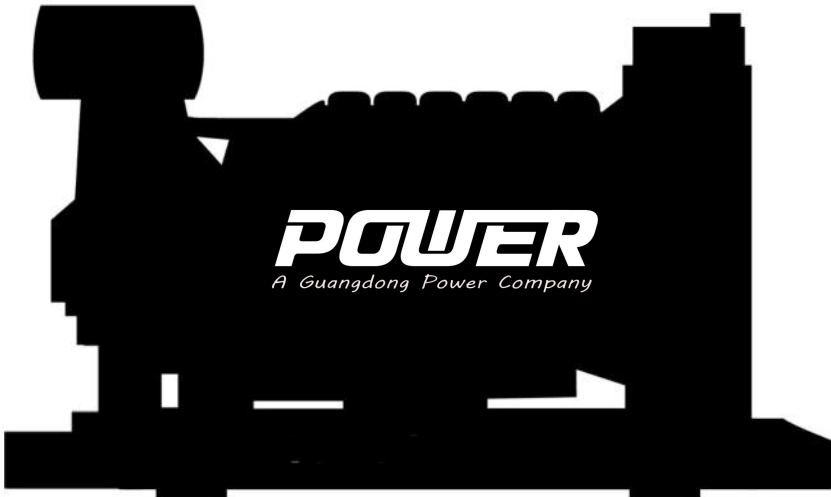

SERVICE		PRP	ESP
POWER	kVA	200	220
POWER	kW	160	176
RATED SPEED	r.p.m.	1.500	
STANDARD VOLTAGE	V	400/230	
AVAILABLE VOLTAGES	V	230/132 · 230 V (t)	
RATED AT POWER FACTOR	Cos Phi	0,8	



INDUSTRIAL RANGE

Guangdong Power Company with quality certification ISO 9001

Guangdong gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2012/46/EU)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2018, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

Continuous Power (COP): According to Standard ISO 8528-1:2018, this is the maximum power available for continuous loads for unlimited running hours a year between the maintenance times recommended by the manufacturer under the environmental conditions established by the same.

G2 class load acceptance in accordance with ISO 8528-5:2018



OPEN SKID



K8



WATER-COOLED



THREE PHASE



50 HZ



NOT AVAILABLE



NATURAL GAS

Gas Generator Set

Model: G200NG



Engine Specifications | 1.500 r.p.m.

Rated Output (PRP)	kW	176
Rated Output (ESP)	kW	196
Manufacturer	Guangdong Power	
Model	G200NG	
Engine Type	4-stroke Otto Cycle	
Injection Type	Carburization	
Aspiration Type	Turbocharged and after-cooled	
Number of cylinders and arrangement	6-L	
Bore and Stroke	mm	123 x 155
Displacement	L	11,1
Cooling System	Coolant	
Lube Oil Specifications	API CD/≥CF, SAE 15W40	
Compression Ratio	10,5 : 1	

Fuel Consumption ESP	Nm3/h	57,6
Fuel Consumption 100% PRP	Nm3/h	52,4
Fuel Consumption 75 % PRP	Nm3/h	40,5
Fuel Consumption 50 % PRP	Nm3/h	28,8
Fuel Consumption 25 % PRP	Nm3/h	17,3
Total oil capacity including tubes, filters	L	28,5
Total coolant capacity	L	105
Heat dissipated by coolant	kW	163
Governor	Type	Electrical
Air Filter	Type	Dry

- 
- Natural Gas engine
 - 4-stroke cycle
 - Water-cooled
 - 24V electrical system
 - Dry air filter
 - Radiator with pusher fan
 - HTW sender
 - LOP sender
 - Electronic governor
 - Hot parts protection
 - Moving parts protection



Generator Specifications | MECC ALTE

Manufacturer	MECC ALTE	
Model	ECO38 2S/4 A	
Poles	No.	4
Connection type (standard)	Star-series	
Mounting type	S-1 14"	
Insulation	Class	H class

Enclosure (according IEC-34-5)	IP23
Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)


- 
- Self-excited and self-regulated
 - AVR governor
 - IP23 protection
 - H class insulation
 - Single drive-shaft
 - Flexible disc coupling

Gas Generator Set

Model: G200NG

WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	3.310
Height (H)	mm	1.839
Width (W)	mm	1.390
Maximum shipping volume	m ³	8,46
Weight with liquids in radiator and sump	Kg	2390
Autonomy	Hours	Ask

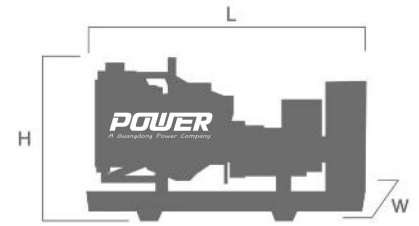

APPLICATION DATA

EXHAUST SYSTEM

Maximum exhaust temperature	°C	750
Exhaust Gas Flow	m ³ /min	35,7
Maximum allowed back pressure	kPa	10,2

NECESSARY AMOUNT OF AIR

Intake air flow	m ³ /h	660
Alternator fan air flow	m ³ /s	0,533

STARTING SYSTEM

Starting power	kW	7
Starting power	CV	9,52
Recommended battery	Ah	150
Auxiliary Voltage	Vdc	24

FUEL SYSTEM

Fuel Oil Specifications	Natural Gas	
Lower heating value (LHV)	kWh/Nm ³	9,85
Composition *	95% Methane	
Fuel supply connection size	Inches	2
Fuel supply pressure	mbar	70 - 300

Gas Generator Set

Model: G200NG



Open set version

- Steel chassis
- Emergency stop button
- Oil sump extraction kit
- Anti-vibration shock absorbers
- Steel industrial silencer -15db(A) attenuation
- Steel residential silencer -35db(A) attenuation. (Opcional).



Gas ramp


- Manual shut-off valve
- Gas filter
- Double solenoid valve
- Primary pressure regulator
- Secondary pressure regulator (Zero pressure regulator)
- Low pressure switch
- Valve (tightness) testing system
- Inlet pressure manometer
- Outlet pressure manometer
- Special Start/Stop sequence
- High pressure regulator (Opcional).
- High pressure switch (Opcional).

Gas Generator Set

Model: G200NG

WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	4.100
Height (H)	mm	2.200
Width (W)	mm	1.600
Maximum shipping volume	m ³	14,43
Weight with liquids in radiator and sump	Kg	3830
Autonomy	Hours	Ask

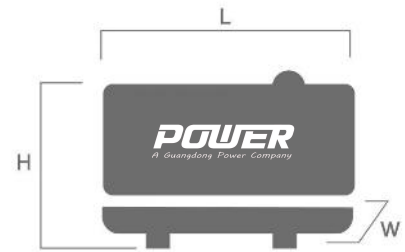

SOUND PRESSURE

Sound pressure level	dB(A)@7m	68 ± 2,4
----------------------	----------	----------

APPLICATION DATA

EXHAUST SYSTEM

Maximum exhaust temperature	°C	750
Exhaust Gas Flow	m ³ /min	35,7
Maximum allowed back pressure	kPa	10,2
Exhaust Flange Size (external diameter)	mm	140

NECESSARY AMOUNT OF AIR

Intake air flow	m ³ /h	660
Alternator fan air flow	m ³ /s	0,533

STARTING SYSTEM

Starting power	kW	7
Starting power	CV	9,52
Recommended battery	Ah	150
Auxiliary Voltage	Vdc	24

FUEL SYSTEM

Fuel Oil Specifications	Natural Gas	
Lower heating value (LHV)	kWh/Nm ³	9,85
Composition *	95% Methane	
Fuel supply connection size	Inches	2
Fuel supply pressure	mbar	70 - 300

Gas Generator Set

Model: G200NG



Soundproofed version

- Steel chassis
- Anti-vibration shock absorbers
- External emergency stop switch
- Bodywork made from high quality steel plate
- High mechanical strength
- Low noise emissions level
- Soundproofing provided by high-density volcanic rock wool
- Epoxy polyester powder coating
- Full access for maintenance (water, oil and filters, no need to remove the canopy)
- Reinforced lifting hooks for crane hoisting
- Watertight chassis (acts as a double barrier against liquid retention)
- Chassis drain plug
- Steel residential silencer -35db(A) attenuation.
- Oil sump extraction kit
- IP Protection according to ISO 8528-13:2016



Gas ramp

- Manual shut-off valve
- Gas filter
- Double solenoid valve
- Primary pressure regulator
- Secondary pressure regulator (Zero pressure regulator)
- Low pressure switch
- Valve (tightness) testing system
- Inlet pressure manometer
- Outlet pressure manometer
- Special Start/Stop sequence
- High pressure regulator (Optional).
- High pressure switch (Optional).