

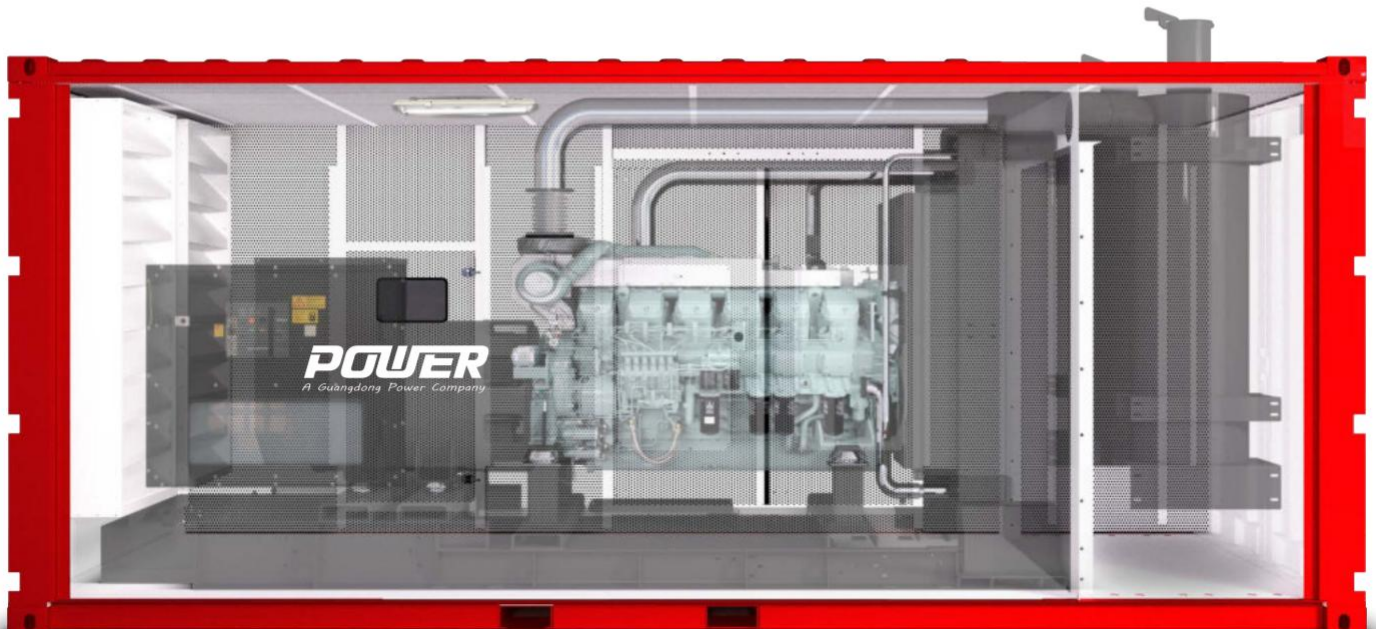


Generators

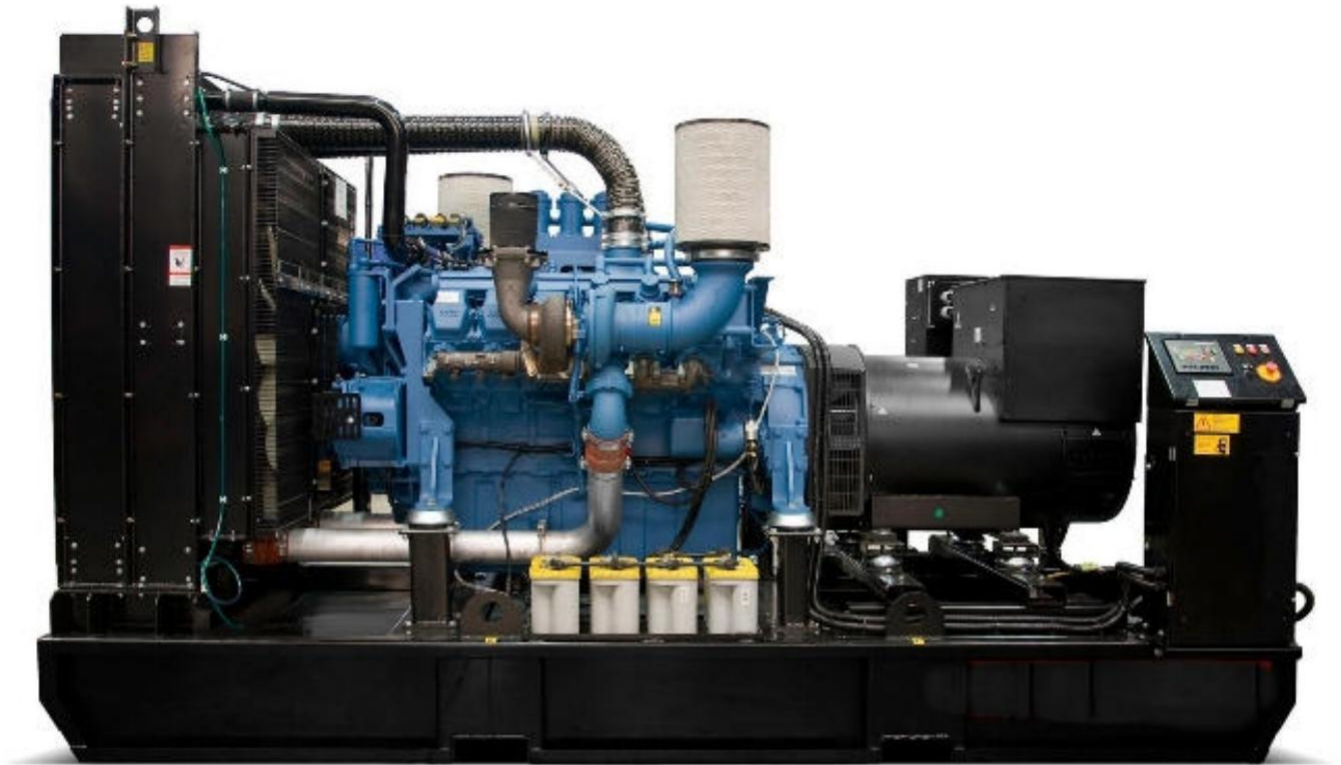


This illustration is only an indicative graphic representation. It does not correspond to any particular model and should not be taken as a real reference.

Open Type

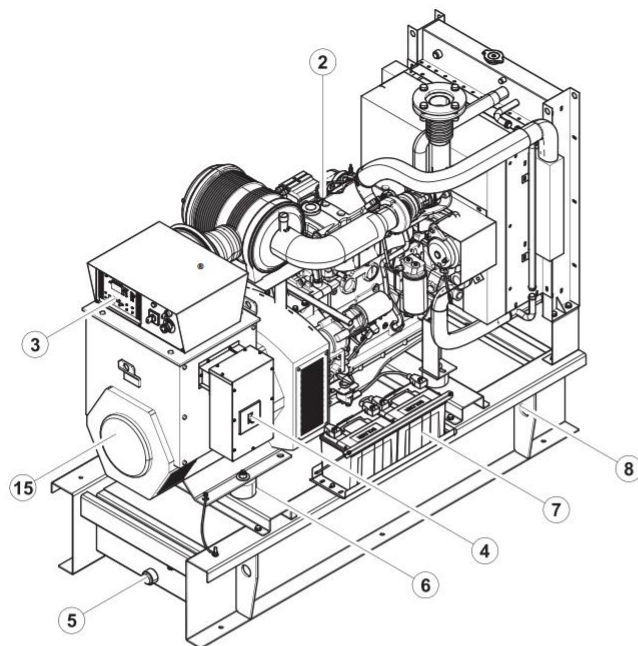

- ① Mounting flange of vent-pipe
- ② Engine
- ③ Control cabinet
- ④ Switch cabinet
- ⑤ Fuel drain
- ⑥ Vibration isolator
- ⑦ Battery
- ⑧ Lifting lug
- ⑨ Radiator
- ⑩ Coolant inlet
- ⑪ Air clearer
- ⑫ Fuel lever meter


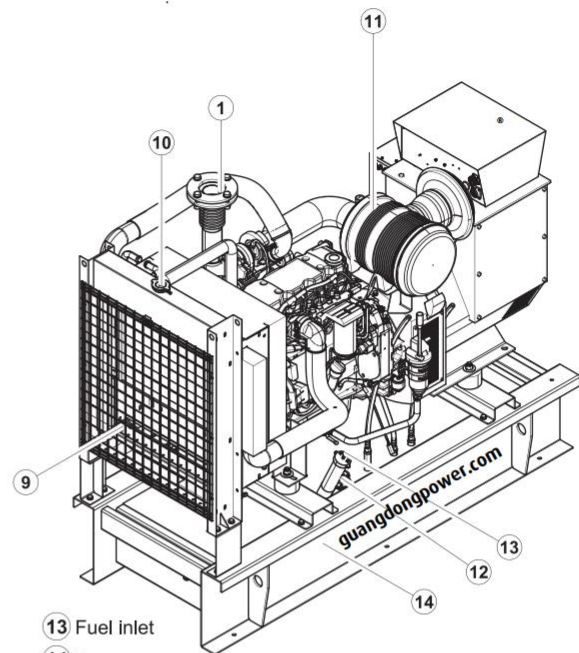


Configuration		
	Genset Model	
Engine	4 stroke water-cooled Diesel engine	●
	Industrial Silencer	●
	Switch in the Negative Pole	●
	Oil Sump Pump	●
	Water Jacket Preheater 220/240V	○
	Oil Preheater	○
	Standard Air Filter	●
	PMG	○
Alternator	Anti-condensing Heater	○
	Winding Temperature Measuring Instrument	○
	IP23 Single Bearing, Class H insulation	●
	Alternator Preheater	○
	AVR	●
	Radiator for 45°C	●
Cooling Systems	Coolant Integrated with genset	●
	Coolant Protection Port	●
	Shelter of Water Tank	●
	Start-up and Charging	●
Starting Systems	Batteries with cables and Switch	●
	Protecting Jacket of Solenoid Terminal	●
	Battery Charger	○
Control Systems	Key Start	●
	AMF	○
	Paralleling	○
	Automatic Refueling	●
Fuel Systems	Breather Valve	●

Standard: ● Optional: ○ Impossible: ✕

	Genset Model	
Fuel Systems	Fuel Level Sensor	●
	Fuel T-valves	○
Canopy and Soundproof Configuration	Outside Refueling	●
	Outside Watering	●
	Rainhat of Hush Pipe	●
	Lifting Lugs	●
	Labbers	●
	Shock Absorbers	●
	Emergency stop button Outlaid	●
	Control Cabinet with windows and doors	●
	No-skid Floor	●
	Air Inlet	●
	Air Outlet	●
	Silencer	●
	Fire Extinguisher	●
	Emergency Light	●
	Rest Room	●
Bases	Base Fuel Tank	●
	Holes for Forklift	●
	Pulling slots	●
	Wiring hole	●
	Earthed Protection	●
	Drain Outlet	●
Materials with Gensets	Parts Manual	●
	Operation manual	●
	Warranty manual	●
	Records notebook of Maintenance	●

Silent Type

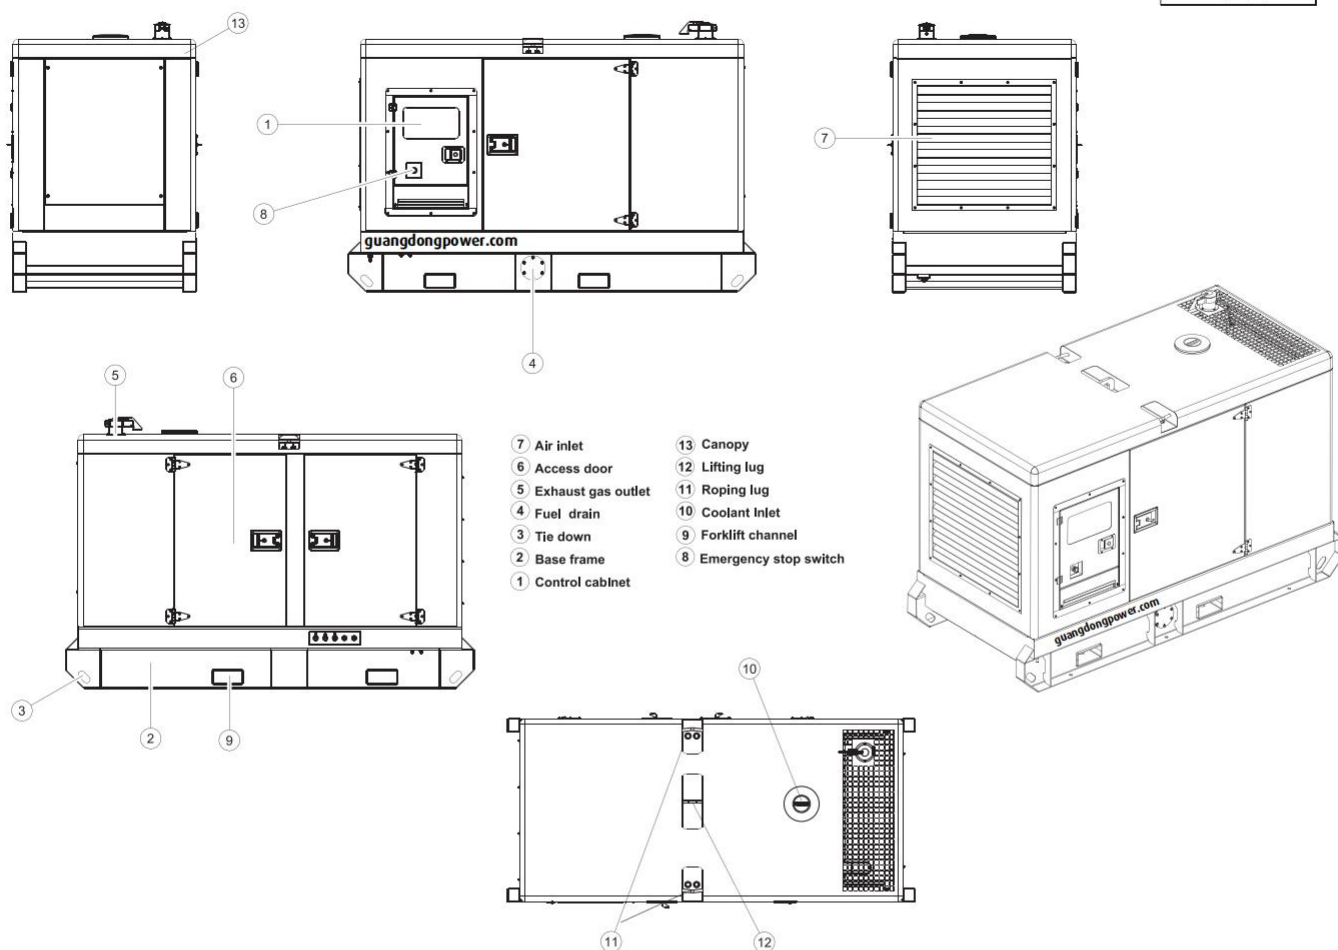

- 7 Air inlet
- 6 Access door
- 5 Exhaust gas outlet
- 4 Fuel drain
- 3 Tie down
- 2 Base frame
- 1 Control cabinet
- 13 Canopy
- 12 Lifting lug
- 11 Roping lug
- 10 Coolant Inlet
- 9 Forklift channel
- 8 Emergency stop switch


















































































































Configuration		
	Genset Model	
Engine	4 stroke water-cooled Diesel engine	●
	Industrial Silencer	●
	Switch in the Negative Pole	●
	Oil Sump Pump	●
	Water Jacket Preheater 220/240V	○
	Oil Preheater	○
	Standard Air Filter	●
Alternator	PMG	○
	Anti-condensing Heater	○
	Winding Temperature Measuring Instrument	○
	IP23 Single Bearing, Class H insulation	●
	Alternator Preheater	○
	AVR	●
Cooling Systems	Radiator for 40℃	●
	Coolant Integrated with genset	●
	Coolant Protection Port	●
	Shelter of Water Tank	●
Starting Systems	Start-up and Charging	●
	Batteries with cables and Switch	●
	Protecting Jacket of Solenoid Terminal	●
Control Systems	Battery Charger	○
	Key Start	●
	AMF	○
	Paralleling	×

	Genset Model	
Fuel Systems	Breather Valve	●
	Fuel Level Sensor	●
	Fuel T-valves	○
Canopy and Soundproof Configuration	Outside Refueling	●
	Outside Watering	●
	Rainhat of Hush Pipe	●
	Lifting Lugs	●
	Shock Absorbers	●
	Emergency stop button Outlaid	●
	Control Cabinet with windows and doors	●
	Air Inlet	●
	Air Outlet	●
	Silencer	●
Bases	Base Fuel Tank	●
	Holes for Forklift	●
	Pulling slots	●
	Wiring hole	●
	Earthed Protection	●
	Drain Outlet	●
	Parts Manual	●
Materials with Gensets	Operation manual	●
	Warranty manual	●
	Records notebook of Maintenance	●

Standard: ● Optional: ○ Impossible: ×

Diesel Generator Powered by Cummins 33kVA - 3000kVA


































































































50HZ

Genset Model	Rating Power		Fuel Cons L/H (75%)	 L*W*H (mm)	 or  L*W*H (mm)	Engine Model	Country of origin	Cyl Arrangement	Displacement (L)	Gov	Cooling
	KW	KVA									
G30DG	24	30	5.7	1680*975*1485	2300*955*1250	4B3.9G12		4L	3.9	M	
G40DG	32	40	5.2	1750*990*1510	2680*1100*1732	4BT3.9G1		4L	3.9	M	
G41DG	32	40	7.3	1750*990*1510	2680*1100*1732	4BT3.9G2		4L	3.9	E	
G50DG	40	50	10	1800*980*1410	2680*1100*1732	4BTA3.9G2		4L	3.9	E	
G60DG	48	60	10	1900*980*1410	2680*1100*1732	4BTA3.9G2		4L	3.9	E	
G80DG	64	80	13.2	1900*980*1410	2680*1100*1732	4BTA3.9G11		4L	3.9	E	
G100DG	80	100	16.9	2150*1000*1440	3170*1100*1780	6BT5.9G2		6L	5.9	E	
G113DG	90	113	20	2150*1000*1440	3170*1100*1780	6BTA5.9G2		6L	5.9	E	
G125DG	100	125	23	2160*1000*1490	3350*1100*1795	6BTA5.9G2		6L	5.9	E	
G138DG	110	138	23	2200*1080*1528	3350*1100*1795	6BTA5.9G2		6L	5.9	E	
G150DG	120	150	26	2200*1080*1528	3600*1170*1950	6BTA5.9G12		6L	5.9	E	
G180DG	144	180	31	2360*1000*1460	3820*1140*2062	6CTA8.3G2		6L	8.3	E	
G200DG	160	200	34	2375*1000*1550	3870*1150*2112	6CTA8.3G2		6L	8.3	E	
G250DG	200	250	39	2600*1070*1690	3970*1170*2222	6LTA8.9G2		6L	8.9	E	
G251DG	200	250	41.3	3040*1150*1960	4215*1400*2250	NT855GA		6L	14	E	
G275DG	220	275	44	3040*1150*1960	4215*1400*2250	6LTA9.5G3		6L	9.5	E	
G300DG	240	300	46.1	3040*1150*1960	4215*1400*2250	NTA855G1A		6L	14	E	
G301DG	240	300	52	3040*1150*1960	4215*1400*2250	6LTA9.5G1		6L	9.5	E	
G313DG	250	313	54.3	3040*1150*1960	4215*1400*2250	NTA855G1B		6L	14	E	
G325DG	260	325	52	3040*1150*1960	4215*1400*2250	6LTA9.5G1		6L	9.5	E	
G350DG	280	350	54.9	3040*1150*1960	4365*1450*2250	NTA855G2A		6L	14	E	
G351DG	280	350	57.5	3040*1150*1960	4365*1450*2250	NTA855G4		6L	14	E	
G360DG	288	360	54	3040*1150*1960	4365*1450*2250	QSG12G1		6L	11.8	E	
G375DG	300	375	64.7	3040*1150*1960	4365*1450*2250	NTA855G7		6L	14	E	
G400DG	320	400	67.8	3040*1150*1960	4365*1450*2250	NTA855G7A		6L	14	E	
G401DG	320	400	57.3	3040*1150*1960	4715*1550*2535	QSN7G3		6L	15	ECM	
G410DG	277	410	60	3040*1150*1960	4715*1550*2535	QSG12G2		6L	11.8	E	
G450DG	360	450	73	3305*1380*2185	4715*1650*2530	KTA19G3		6L	18.9	E	
G500DG	400	500	74.2	3305*1380*2185	4715*1650*2530	QSZ13G3		6L	13	ECM	
G501DG	400	500	94	3305*1205*2185	4715*1650*2530	KTA19G3A		6L	18.9	E	
G502DG	400	500	82	3375*1405*2080	4715*1650*2530	KTA19G4		6L	18.9	E	
G503DG	400	500	79	3400*1330*2030	4500*1550*2450	QSX15G8		6L	15	ECM	
G600DG	480	600	NA	3688*1500*2285	4615*1650*2530	KTA19G8		6L	18.9	E	
G625DG	500	625	95.2	3688*1500*2285	4615*1650*2530	KTA19G6A		6L	18.9	E	
G636DG	509	636	104	3740*1980*2380	4800*1950*2450	VTA28G5		12V	28	ECF	
G650DG	520	650	111	3740*1980*2380	4615*1650*2530	QSK19G4		6L	18.9	E	
G750DG	600	750	128	3780*1875*2205	ISO 20ft container	KTA38G2		12V	37.8	E	
G751DG	600	750	91	3980*1880*2205	ISO 20ft container	VTA28G6		12V	28	ECF	
G800DG	640	800	NA	4315*2020*2235	ISO 20ft container	KTA38G2B		12V	37.8	E	
G801DG	640	800	121	4315*2020*2235	ISO 20ft container	QSK23G3		6L	23.15	ECM	
G900DG	720	900	147	4315*2020*2235	ISO 20ft container	KTA38G2A		12V	37.8	E	
G1000DG	800	1000	161	4370*2010*2400	ISO 20ft container	KTA38G5		12V	37.8	E	
G1001DG	800	1000	151	4370*2010*2400	ISO 20ft container	QST30G4		12V	30.48	ECM	
G1125DG	900	1125	137	4370*2010*2400	ISO 20ft container	KTA38G9		12V	27.8	E	
G1250DG	1000	1250	195	5025*2115*2519	ISO 20/40ft container	KTA50G3		16V	50.3	E	
G1251DG	1000	1250	206	REQ	ISO 20ft container	QSKTA38G5		12V	37.7	ECM	
G1400DG	1120	1400	155	5420*2140*2500	ISO 40ft container	KTA50G8		16V	50.3	E	
G1500DG	1200	1500	238	5420*2140*2500	ISO 40ft container	KTA50G8S		16V	50.3	E	
G1650DG	1320	1650	265	5630*2275*2610	ISO 40ft container	QSK50G7		16V	50.3	ECM	
G1875DG	1500	1875	270	5990*2290*2700	ISO 40ft container	QSK60G3		16V	60.2	ECM	
G2000DG	1600	2000	291	6075*2310*2735	ISO 40ft container	QSK60G4		16V	60.2	ECM	
G2001DG	1600	2000	302	REQ	ISO 40ft container	QSK60G13		16V	60.2	ECM	
G2250DG	1800	2250	361	REQ	ISO 40ft container	QSK60G21		16V	60.2	ECM	
G2500DG	2000	2500	375	REQ	REQ	QSK78G18		18V	77.6	ECM	
G2750DG	2200	2750	406	REQ	REQ	QSK78G9		18V	77.6	ECM	

 Water-cooling
  Open-side type
  Sound-proof type
  Containerized type
  The engine is China original
  The engine is India original
  The engine is USA original
  The engine is UK original

Diesel Generator
Powered by Cummins
35kVA - 3438kVA









































































































60HZ

Genset Model	Rating Power		Fuel Cons L/H (75%)	 L*W*H (mm)	 or  L*W*H (mm)	Engine Model	Country of origin	Cyl Arrangement	Displacement (L)	Gov	Cooling
	KW	KVA									
35D6	25	31	8.4	1750*990*1510	2580*1040*1732	4B3.9G2		4L	3.9	E	
55D6	40	50	13.4	1750*990*1510	2580*1040*1732	4BT3.9G2		4L	3.9	E	
66D6	48	60	15.3	1800*980*1410	2680*1100*1732	4BTA3.9G2		4L	3.9	E	
75D6	54	68	20.7	1800*980*1410	2680*1100*1732	4BTA3.9G2		4L	3.9	E	
100D6	72	90	23	1900*980*1410	2680*1100*1732	4BTA3.9G11		4L	3.9	E	
110D6	80	100	28	2150*1000*1440	3170*1100*1780	6BT5.9G2		6L	5.9	E	
125D6	90	113	28	2150*1000*1440	3170*1100*1780	6BT5.9G2		6L	5.9	E	
150D6	110	138	33	2150*1000*1440	3170*1100*1780	6BTA5.9G2		6L	5.9	E	
165D6	120	150	33	2160*1000*1490	3350*1100*1795	6BTA5.9G2		6L	5.9	E	
188D6	136	170	37	2160*1000*1490	3350*1100*1795	6BTA5.9G12		6L	5.9	E	
200D6	144	180	44	2360*1000*1460	3820*1140*2062	6CTA8.3G2		6L	8.3	E	
220D6	160	200	44	2360*1000*1460	3820*1140*2062	6CTA8.3G2		6L	8.3	E	
250D6	180	225	56.1	2375*1000*1550	3870*1150*2112	6CTAA8.3G2		6L	8.3	E	
275D6	200	250	61.7	2600*1070*1690	3970*1170*2222	6LTA8.9G2		6L	8.9	E	
300D6	220	275	66	2600*1070*1690	3970*1170*2222	6LTA8.9G2		6L	8.9	E	
344D6	250	313	52	3040*1150*1960	4215*1400*2250	6LTA9.5G1		6L	9.5	E	
350D6	250	313	76	3040*1150*1960	4215*1400*2250	NTA855G1		6L	14	E	
388D6	280	350	86	3040*1150*1960	4215*1400*2250	NTA855G1B		6L	14	E	
440D6	320	400	93	3040*1150*1960	4365*1450*2250	NTA855G3		6L	14	E	
500D6	360	450	92	3375*1355*2188	4615*1650*2530	KTA19G2		6L	18.9	E	
550D6	400	500	101	3375*1355*2188	4615*1650*2530	KTA19G3		6L	18.9	E	
625D6	450	563	106.5	3375*1305*2062	4615*1650*2530	KTA19G3A		6L	18.9	E	
625D6A	450	563	113	3375*1305*2062	4615*1650*2530	KTA19G4		6L	18.9	E	
688D6	500	625	118	3688*1500*2285	4615*1650*2530	KTA19G5		12V	18.9	E	
710E6	516	645	109	3688*1500*2285	4615*1650*2530	QSK19G4		12V	27.8	ECM	
750D6	NA	NA	NA	3688*1500*2285	4615*1650*2530	KTA19G6A		12V	18.9	E	
750E6	550	688	157	3688*1500*2285	4615*1650*2530	QSK19G5		12V	27.8	ECM	
850D6	620	775	NA	4315*2020*2235	ISO 20ft container	KTA38-G		12V	37.8	E	
963D6	700	875	164	4315*2020*2235	ISO 20ft container	KTA38G1		12V	37.8	E	
1000D6	728	910	190	4315*2020*2235	ISO 20ft container	KTA38G2		12V	37.8	E	
1000E6	728	910	139	4315*2020*2235	ISO 20ft container	QSK23G3		6L	23.15	E	
1038D6	748	935	NA	4315*2020*2235	ISO 20ft container	KTA38G2B		12V	27.8	E	
1125D6	820	1025	202	4315*2020*2235	ISO 20ft container	KTA38G2A		12V	27.8	E	
1125E6	820	1025	154	4315*2020*2235	ISO 20ft container	QST30G3		12V	30.48	ECM	
1250D6	910	1138	220	4370*2010*2400	ISO 20ft container	KTA38G4		16V	50.3	E	
1250E6	910	1138	177	4370*2010*2400	ISO 20ft container	QST30G4		12V	30.48	ECM	
1375D6	NA	NA	257	4370*2010*2400	ISO 20ft container	KTA38G9		16V	50.3	E	
1450E6	960	1200	202	4370*2010*2400	ISO 20ft container	QSKTA38G5		12V	37.7	ECM	
1563D6	1134	1418	291	4950*2000*2580	ISO 20/40ft container	KTA50G3	 	16V	50.3	E	
1875D6	1295	1619	257	5420*2140*2500	ISO 40ft container	KTA50G9	 	16V	50.3	E	
1875E6	1365	1706	291	REQ	ISO 40ft container	QSK50G4		16V	50.3	ECM	
2250E6	1632	2040	NA	REQ	ISO 40ft container	QSK60G5		16V	60.2	ECM	
2500E6	1825	2281	356	REQ	ISO 40ft container	QSK60G6		16V	60.2	ECM	
2750E6	1800	2250	NA	REQ	ISO 40ft container	QSK60G14		16V	60.2	ECM	
3125E6	2275	2844	475	REQ	REQ	QSK78G7		18V	77.6	ECM	
3438E6	2500	3125	500	REQ	REQ	QSK78G8		18V	77.6	ECM	

 Water-cooling  Open-side type  Sound-proof type  Containerized type  The engine is China original  The engine is India original  The engine is USA original  The engine is UK original



Diesel Generator Powered by Perkins 10kVA - 2500kVA

Genset Model	Rating Power		Fuel Cons L/H (75%)	 L*W*H (mm)	 or  L*W*H (mm)	Engine Model	Country of origin	Cyl Arrangement	Displacement (L)	Gov	Cooling
	KW	KVA									
P10D5	7.2	9	2.3	1140*550*1020	1870*730*1136	403A-11G1	 	3L	1.131	M	
P15D5	10	13	2.8	1450*550*1190	2067*905*1281	403A-15G1	 	3L	1.5	M	
P16.5D5	12	15	3.1	1450*550*1190	2067*905*1281	403A-15G2	 	3L	1.496	M	
P22D5	16	20	4	1660*550*1255	2067*905*1281	404A-22G1	 	4L	2.216	M	
P33D5	24	30	5.4	1915*750*1410	2220*1005*1315	1103A-33G	 	3L	3.3	M	
P50D5	36	45	8.2	1915*750*1410	2590*1005*1296	1103A-33TG1	 	3L	3.3	M	
P66D5	48	60	10.4	1920*750*1410	2590*1005*1296	1103A-33TG2	 	3L	3.3	M	
P72D5	52	65	11.2	2180*800*1375	2700*1100*1632	1104A-44TG1	 	4L	4.4	M	
P88D5	64	80	14	2180*800*1375	2700*1100*1632	1104A-44TG2	 	4L	4.4	M	
P110D5	80	100	17.1	2165*830*1290	2800*1100*1701	1104C-44TAG2	 	4L	4.4	E	
P150D5	108	135	22.7	2590*800*1550	3400*1100*1972	1106A-70TG1	 	6L	7.01	M	
P165D5	120	150	24.7	2575*830*1345	3600*1100*2170	1106A-70TAG2	 	6L	7.01	M	
P200D5	144	180	31.8	2763*890*1375	3600*1100*2170	1106A-70TAG3	 	6L	7.01	M	
P220D5	160	200	34.7	2763*890*1375	3600*1100*2170	1106A-70TAG4	 	6L	7.01	E	
P250DE5	180	225	35.7	2845*1030*1495	4120*1250*2207	1506A-E88TAG2		6L	8.8	ECM	
P275DE5	200	250	41.6	2975*1098*1665	4120*1130*2207	1506A-E88TAG3		6L	8.8	ECM	
P300E5	220	275	45.8	2975*1098*1665	4120*1130*2207	1506A-E88TAG4		6L	8.8	ECM	
P330E5	240	300	48	2975*1098*1610	4265*1400*2240	1506A-E88TAG5		6L	8.8	ECM	
P400E5	280	350	54	3180*1180*1930	4400*1400*2525	2206C-E13TAG2		6L	12.5	ECM	
P450E5	320	400	62	3180*1180*1930	4400*1400*2525	2206C-E13TAG3		6L	12.5	ECM	
P500E5	360	450	72	3450*1260*1955	4750*1400*2415	2506C-E15TAG1		6L	15.2	ECM	
P550E5	400	500	76	3450*1260*1955	4750*1400*2415	2506C-E15TAG2		6L	15.2	ECM	
P660E5	480	600	90	3600*1540*2170	4750*1800*2490	2806C-E18TAG1A		6L	18.13	ECM	
P715E5	520	650	97	3600*1540*2170	4750*1800*2490	2806A-E18TAG2		6L	18.13	ECM	
P825D5	600	750	122	3800*1750*2230	ISO 20ft container	4006-23TAG2A	 	6L	22.921	E	
P880D5	640	800	130	4600*2000*2365	5612*2140*2500	4006-23TAG3A	 	6L	22.921	E	
P1000D5	720	900	143	4700*2050*2210	ISO 20ft container	4008TAG1A	 	8L	30.561	E	
P1100D5	800	1000	163	4700*2050*2210	5900*2240*2505	4008TAG2A	 	8L	30.561	E	
P1250D5	900	1125	188	4830*2050*2190	ISO 20ft container	4008-30TAG3	 	8L	30.561	E	
P1375D5	1000	1250	196	4830*2195*2425	ISO 20ft container	4012-46TWG0A	 	12V	45.842	E	
P1500D5	1080	1350	213	4920*2010*2520	ISO 20ft container	4012-46TWG3A	 	12V	45.842	E	
P1650D5	1200	1500	201	4920*2170*2530	ISO 20ft container	4012-46TAG2A	 	12V	45.842	E	
P1850D5	1320	1650	275	4920*2170*2530	ISO 20ft container	4012-46TAG3A	 	12V	45.842	E	
P1875D5	1364	1705	275	4920*2170*2530	ISO 20ft container	4012-46TAG3A	 	12V	45.842	E	
P2030D5	1476	1845	277	5962*2128*2522	ISO 20ft container	4016TAG1A	 	16V	61.123	E	
P2260D5	1640	2050	316	5962*2128*2522	ISO 40ft container	4016TAG2A	 	16V	61.123	E	
P2500D5	1800	2250	346	6265*2210*3040	ISO 40ft container	4016-61TRG3	 	16V	61.123	E	

 Water-cooling

 Open-side type

 Sound-proof type

 Containerized type

 The engine is USA original

 The engine is UK original

 The engine is China original























































































 The engine is India original

Diesel Generator

Powered by Perkins

12kVA - 1880kVA

60HZ


Genset Model	Rating Power		Fuel Cons L/H (75%)	 L*W*H (mm)	 or  L*W*H (mm)	Engine Model	Country of origin	Cyl Arrangement	Displacement (L)	Gov	Cooling
	KW	KVA									
P12D6	9	11	2.3	1460*550*1190	1870*730*1136	403D-11G		3L	1.131	M	
P17D6	12	15	5.5	1450*550*1190	1870*730*1136	403D-15G		3L	1.496	M	
P20D6	14	18	NA	1450*550*1190	2070*905*1285	403A-15G2	 	3L	1.496	M	
P27D6	19	24	4.8	1660*550*1255	2010*905*1285	404D-22G		4L	2.216	M	
P38D6	28	35	6.6	1915*765*1410	2200*950*1331	1103A-33G	 	3L	3.3	M	
P59D6	42	53	9.9	1915*750*1410	2400*900*1276	1103A-33TG1	 	3L	3.3	M	
P75D6	54	68	12.5	1912*825*1570	2700*1100*1632	1103A-33TG2	 	3L	3.3	M	
P84D6	61	76	13.5	2120*750*1406	2700*1100*1632	1104A-44TG1	 	4L	4.4	M	
P100D6	73	91	16.9	2120*800*1375	2700*1100*1632	1104A-44TG2	 	4L	4.4	M	
P125D6	90	112.5	20.2	2145*800*1390	2810*1100*1700	1104C-44TAG2	 	4L	4.4	E	
P169D6	122	152	26.5	2320*1010*1600	3400*1100*1795	1106A-70TG1	 	6L	7.01	M	
P188D6	135	169	29.1	2380*1020*1600	3550*1100*1900	1106A-70TAG2	 	6L	7.01	M	
P220D6	160	200	35.3	2380*1020*1600	3550*1100*1900	1106A-70TAG3	 	6L	7.8	M	
P269E6	196	245	41.8	2750*1180*1730	3670*1286*2207	1506A-E88TAG2		6L	8.8	ECM	
P313E6	225	281	47.5	2750*1180*1730	3670*1286*2207	1506A-E88TAG3		6L	8.8	ECM	
P344E6	250	313	51.1	2750*1180*1730	3800*1386*2252	1506A-E88TAG4		6L	8.8	ECM	
P375E6	270	338	56.8	2750*1180*1730	3800*1386*2252	1506A-E88TAG5		6L	8.8	ECM	
P438E6	320	400	65	2750*1180*1730	4400*1400*2460	2206A-E13TAG2		6L	12.5	ECM	
P438E6A	320	400	63	2750*1180*1730	4400*1400*2460	2206A-E13TAG5		6L	12.5	ECM	
P500E6	360	450	69	2750*1180*1730	4400*1400*2460	2206A-E13TAG6		6L	12.5	ECM	
P563E6	400	500	77	3180*1180*1930	4750*1400*2466	2506A-E15TAG1		6L	15.2	ECM	
P625E6	450	563	96	3180*1180*1930	4750*1400*2466	2506C-E15TAG3		6L	15.2	ECM	
P625E6A	450	563	NA	3180*1180*1930	4750*1400*2466	2506C-E15TAG4		6L	15.2	ECM	
P688E6	500	625	100	3450*1260*1955	4750*1800*2490	2806A-E18TAG1A		6L	18.13	ECM	
P750E6	550	688	112	3450*1260*1955	4750*1800*2490	2806A-E18TAG3		6L	18.13	ECM	
P825D6	600	750	126	3600*1540*2170	ISO 20ft Container	4006-23TAG2A	 	6L	22.921	E	
P938D6	675	844	144	3800*1750*2230	ISO 20ft Container	4006-23TAG3A	 	6L	22.921	E	
P975D6	707	884	147	3800*1750*2230	ISO 20ft Container	4008TAG1		8L	30.561	E	
P1100D6	800	1000	162	4500*2050*2210	ISO 20ft Container	4008TAG2	 	8L	30.561	E	
P1375D6	1000	1250	209	4550*2010*2520	ISO 40ft container	4012-46TWG2A	 	12V	45.842	E	
P1500D6	1080	1350	227	4550*2010*2520	ISO 40ft container	4012-46TWG3A	 	12V	45.842	E	
P1675D6	1200	1500	246	4900*2200*2425	ISO 40ft container	4012-46TAG2A	 	12V	45.842	E	
P1880D6	1360	1700	277	4920*2170*2530	ISO 40ft container	4012-46TAG3A	 	12V	45.842	E	

 Water-cooling

 Open-side type


 Sound-proof type

 Containerized type

 The engine is USA original

 The engine is UK original

 The engine is China original

 The engine is India original



Company Profile

Guangdong Power Ltd was established in 1990 ,the manufacturer of Diesel and Gas Generator Set,Lighting Towers and Power Solution.

Our product range includes diesel and gas generator sets, power distribution engineering, LV& HV switchboard, power transformer. We supply Cummins Engine Series & Perkins Engine Series cover various power from 5KVA to 2750KVA.

We manufacture, sells, debugs, tests, and distributes electric power equipment, engineering machinery, construction machinery, electromechanical equipment.

We also invests in, operates, and maintains electric grids and manages electric power plant.

35+

years
since 1990

500+

employees all
over the world

24/7

technical and
service support